

# STAKKAbox™ Modula

## Access Chamber Section

600mm x 600mm




### Product Description

STAKKAbox™ Modula is a range of modular access chambers, made from 150mm deep riser sections which stack and interlock to offer flexibility in finished chamber depths.

### Product Details

Clear Opening: 600mm x 600mm  
 External Dimensions: 693mm x 693mm  
 Stacking Depth: 155mm  
 Actual Depth: 165mm

Weight: 6.4kg  
 Product Code: CPMORS-06000600  
 Delivery Options: Solid Ring

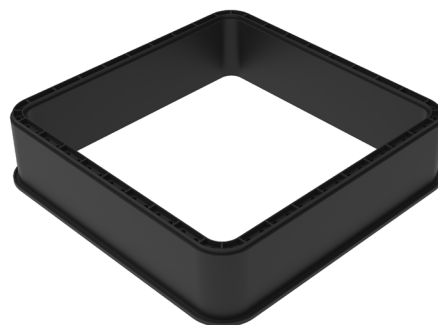

### Materials Properties

Material Profile	Polypropylene (PP)	Black
Tensile Strength	ISO 527-4	27.6 MPA
Flexural Strength	ISO 14125	40 MPA
Flexural Modulus	ISO 14125	2.4 GPA
Impact Strength	ISO 179	50 J/mm <sup>2</sup>
Deflection Temperature Range (0.46MPA)	ISO 75-2	82.2°C
Density (g/cm <sup>3</sup> )	ISO 1183	1.05 g/cm <sup>3</sup>
Water Absorption	ISO 62	0.03%
Volume Resistivity	IEC 60093	1.00E +16
Fire Performance	UL 94	HB
Limited Oxygen Index	ISO 4589-2	21%

### Installation


STAKKAbox™ Modula has been tested to withstand vertical loads of EN124. Please refer to the STAKKAbox™ Installation Guide for installation details.

### Key Features


- Fast and easy to install
- Sectional & twin wall design
- Smooth outer walls with lip to 'key' in



Scan for access to technical documents library

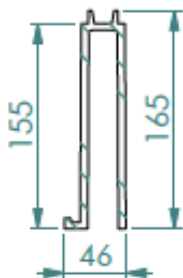

Modula cross-section detail

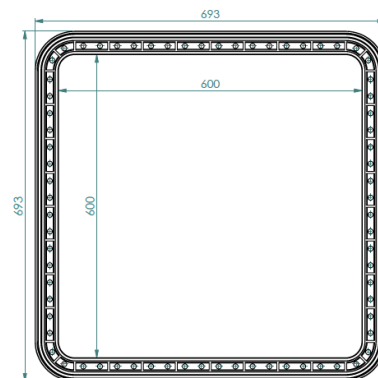

Modula cross-section top view

CPMO-06000600 V.01 18/12/2018